


SPECIFICATIONS

MODEL	B760
ENGINE	
Emissions Tier (EPA)	Tier 4
Horsepower	96.0 hp (71.6 kW)
Engine Fuel	Diesel
Engine Make	Bobcat
Engine Cooling	Liquid
PERFORMANCE	
Transmission Type	Power Shift
Max. Travel Speed	22.6 mph (36.4 km/hr.)
Operating Weight	19,224 lb. (8720 kg)
Brake Type	Wet Multi-Disc
DIMENSIONS	
Overall Length in Travel Position	293.0 in. (7450 mm)
Wheelbase	87.4 in. (2220 mm)
Ground Clearance	13.3 in. (339 mm)
Overall Height Without Beacon	113.3 in. (2880 mm)
Machine Width	89.5 in. (2275 mm)
Machine Width With Stabilizers Folded Down	142.4 in. (3618 mm)
Overall Height in Travel Position	147.4 in. (3745 mm)

MODEL	B760
LOADER PERFORMANCE	
Lift Capacity at Full Height	7985 lb. (3622 kg)
Bucket Breakout Force	14,388 lbf. (64,000 N)
BACKHOE PERFORMANCE	
Lift Capacity at Max. Reach	2204 lb. (1000 kg)
Arm Digging Force	9667 lb. (4384 kg)
Bucket Digging Force	14,388 lb. (6526 kg)
MACHINE FEATURES	
Differential Lock	Std
Rotating Flashing Beacon	Std
Selectable 4-Wheel Drive	Std
Extendable Arm	Std
Ride Control	Std
Enclosed Cab With Heater/Air Conditioning	Opt

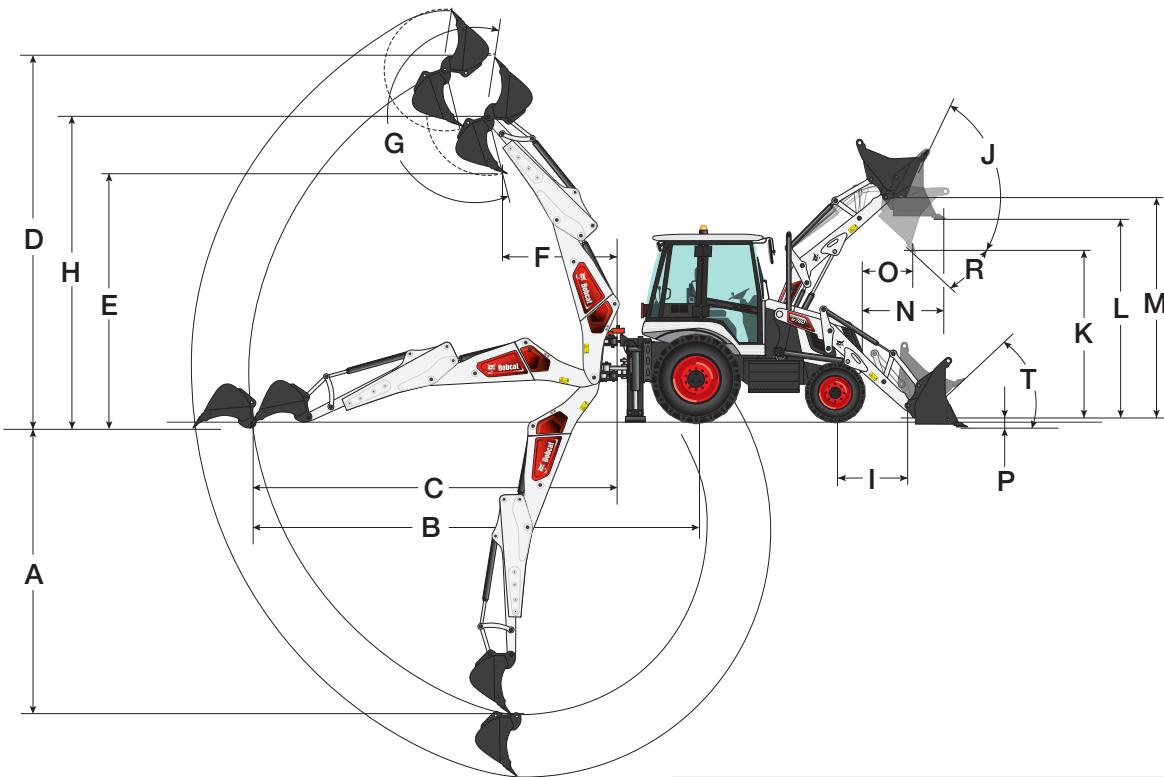

BACKHOE DIMENSIONS	RETRACTED	EXTENDED
A - Max. Digging Depth	182.6 in. (4633 mm)	221.4 in. (5623 mm)
B - Max. Reach From Rear Axle Center	280.9 in. (7135 mm)	317.4 in. (8063 mm)
C - Max. Reach From Swing Center	228.1 in. (5795 mm)	265.2 in. (6735 mm)
D - Max. Digging Height	225.2 in. (5720 mm)	259.2 in. (6584 mm)
E - Max. Dumping Height	152.9 in. (3884 mm)	188.3 in. (4783 mm)
F - Loading Reach	71.3 in. (1810 mm)	99.5 in. (2527 mm)
G - Bucket Rotation Angle	202°	202°
H - Max. Bucket Hinge Pin Height	188.2 in. (4780 mm)	216.2 in. (5492 mm)

LOADER DIMENSIONS	
I - Distance Between Hinge Pin and Front Axle Center	48.4 in. (1230 mm)
J - Max. Rollback Angle, Fully Raised	64°
K - Dump Height	106.0 in. (2693 mm)
L - Load-Over Height	126.4 in. (3210 mm)
M - Height to Hinge Pin	136.0 in. (3455 mm)
N - Max. Reach at Full Height	47.4 in. (1205 mm)
O - Dumping Reach	29.7 in. (753 mm)
P - Digging Depth	5.0 in. (127 mm)
R - Dump Angle at Max. Height	44°
T - Max. Rollback Angle, Ground Level	45°